


SPECIFICATIONS

Current Rating: 1Amps
 Insulator resistance: 5000 Megchms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~ to +105° C
 Contact Material: Phosphor Bronzs
 Insulator Material: NY-6T
 Plating: Tin , Gold plated
 Unspecified tolerance: ±0.20

Plastic Base

Type	
H	2.0

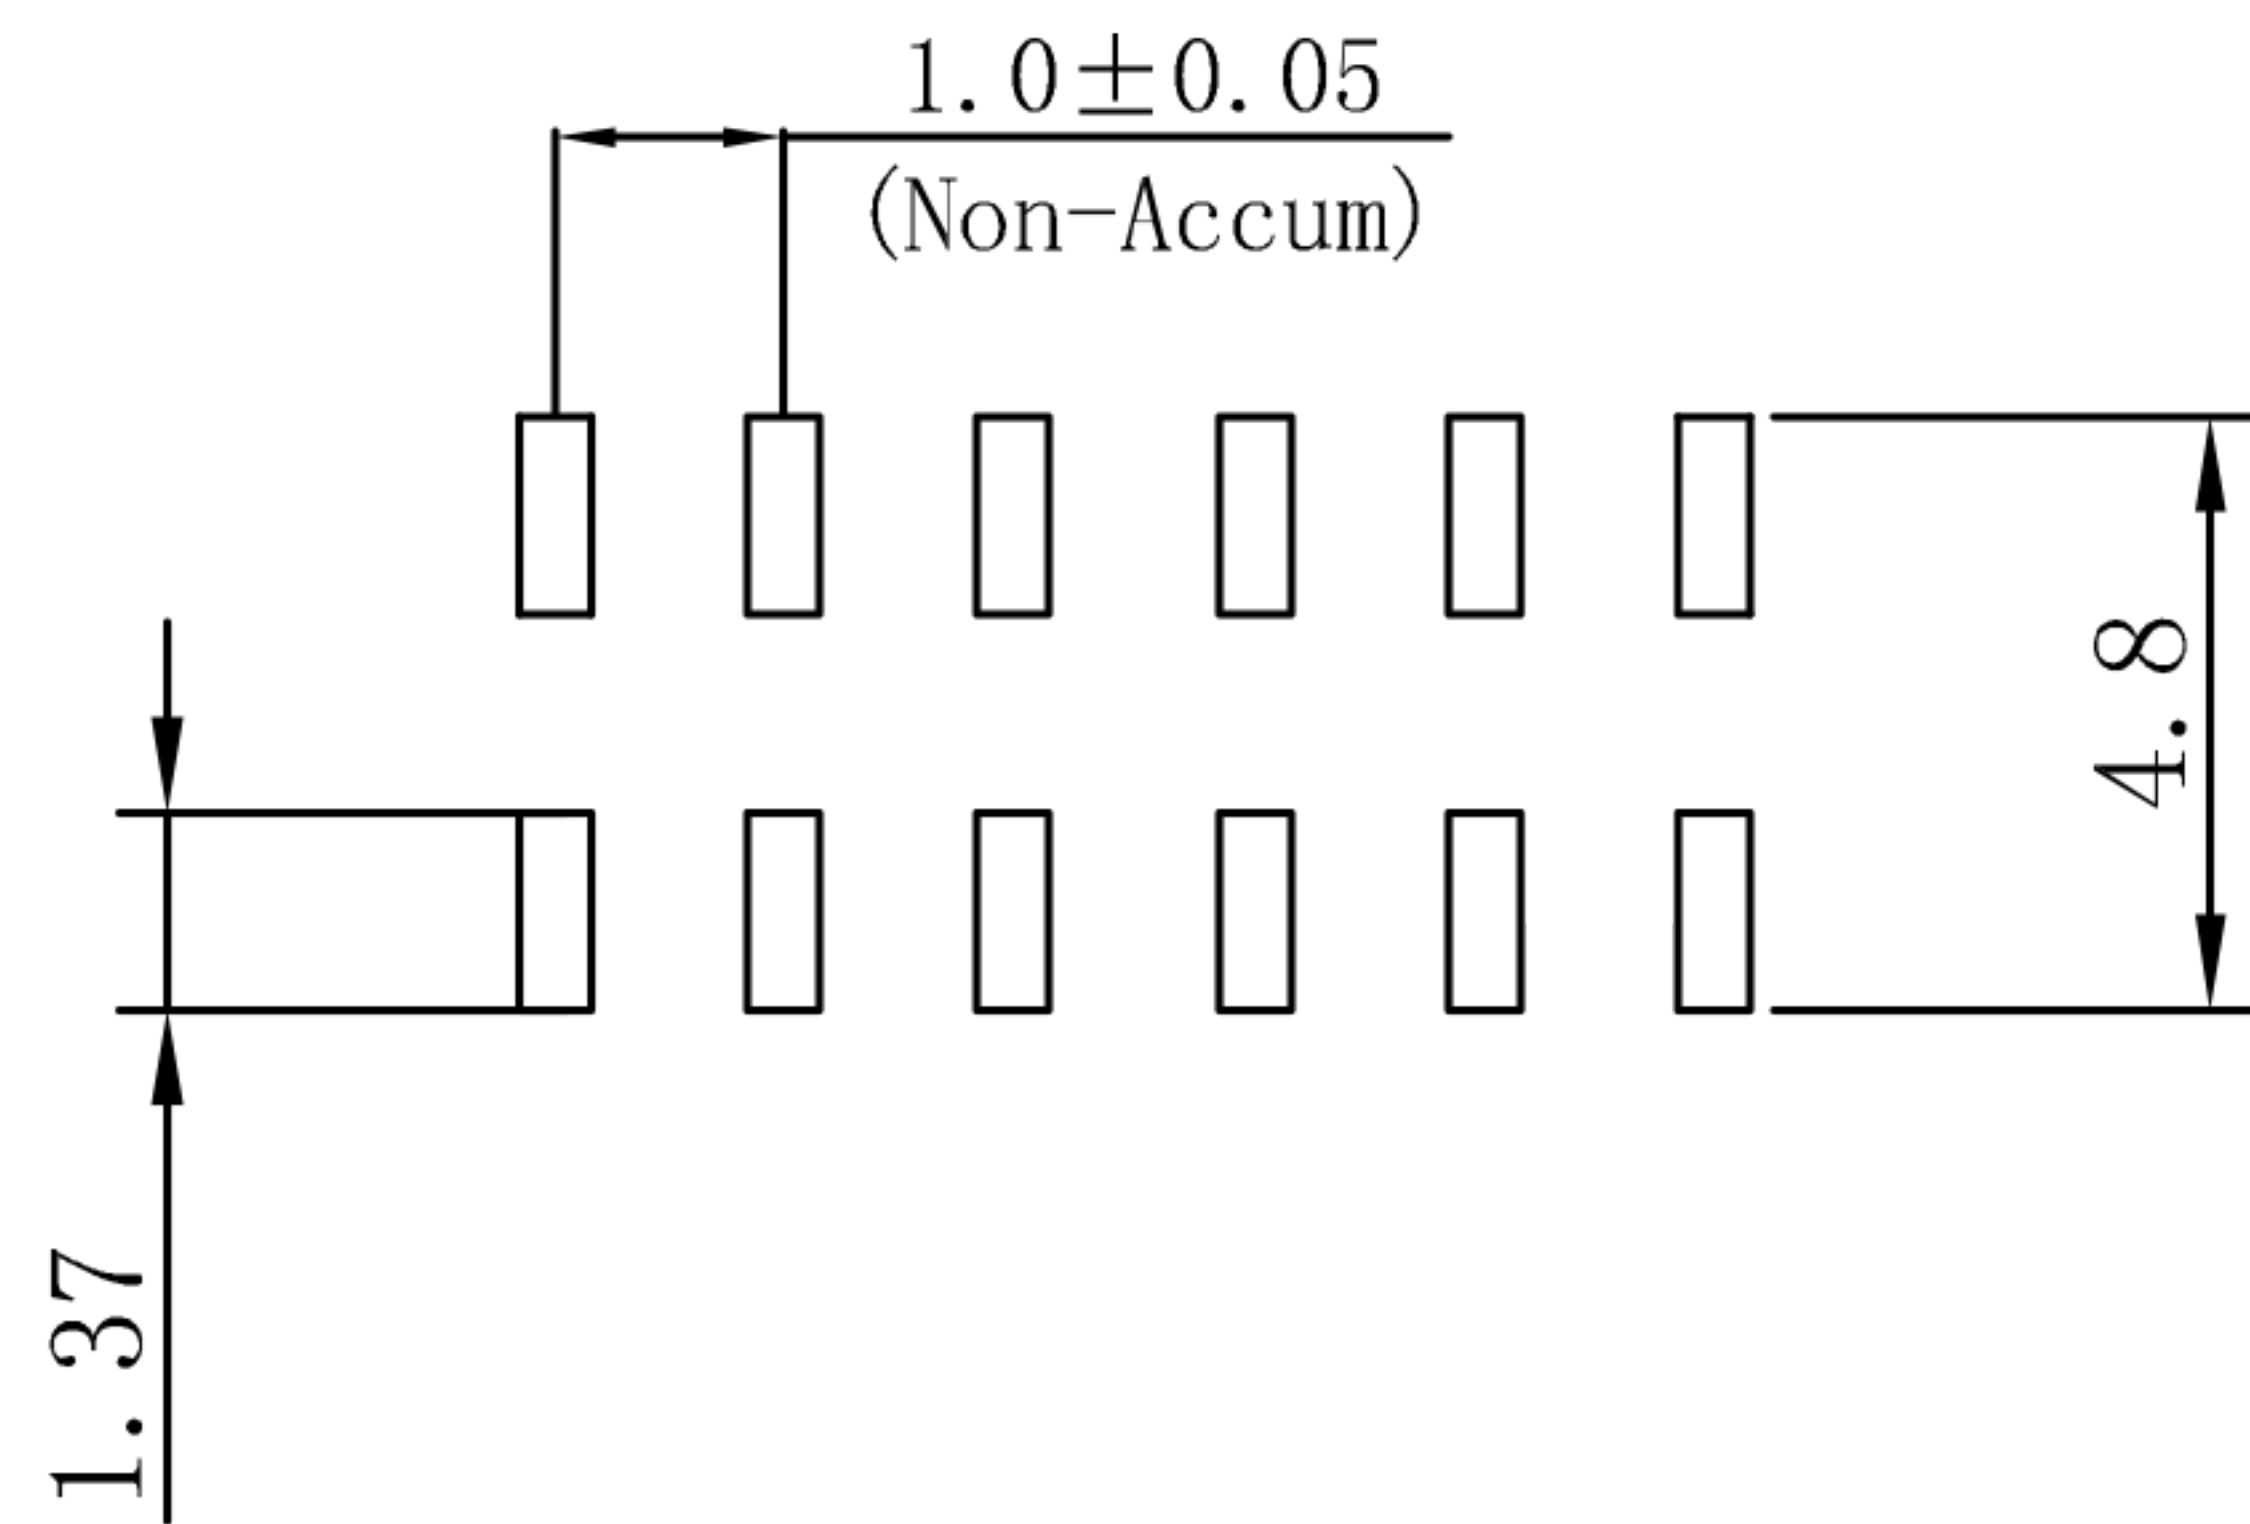

PCB LAYOUT

APPROVALS		DATE	深圳市联丰盈电子有限公司 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD					
DRAWN	ZHIWEI.CHEN	2015.07.07						
CHECKED			TITLE: PH1.0*2.0 SMT 排母					
APPROVALS			PART NO. GP25-1002WVS-2xNP					
TOLERANCES ARE	30~以上	±0.30	ANGLE UNIT: mm SCALE: 1:1 PROJ:					
	10~30	±0.20						
	5~10	±0.15						
	~ 5	±0.10						
ECN NO.	REV. A	DATE.	DESCRIPTION. NEW	CHANGE.	CHECK.	APPRO.	DRAWING NO.	SHEET 1 OF 1