
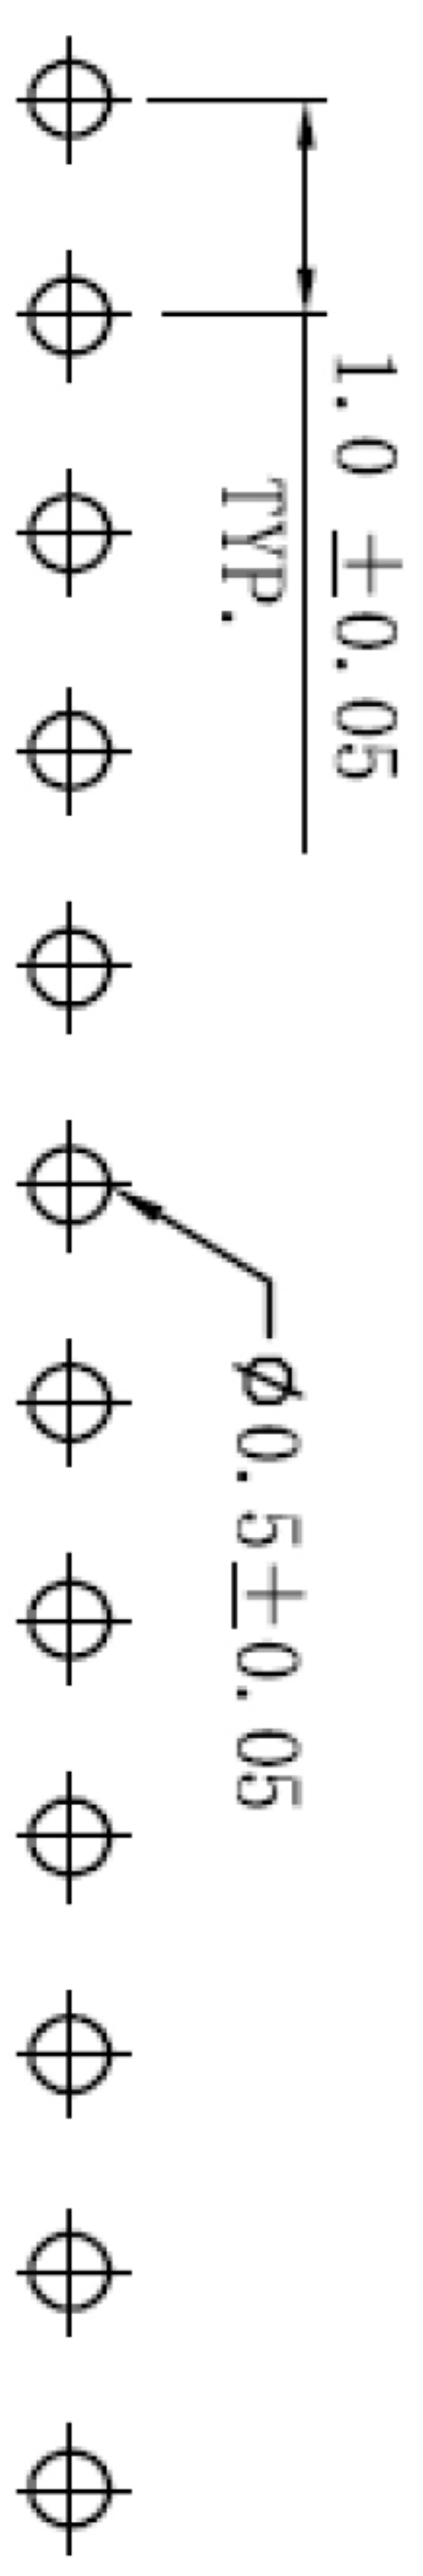
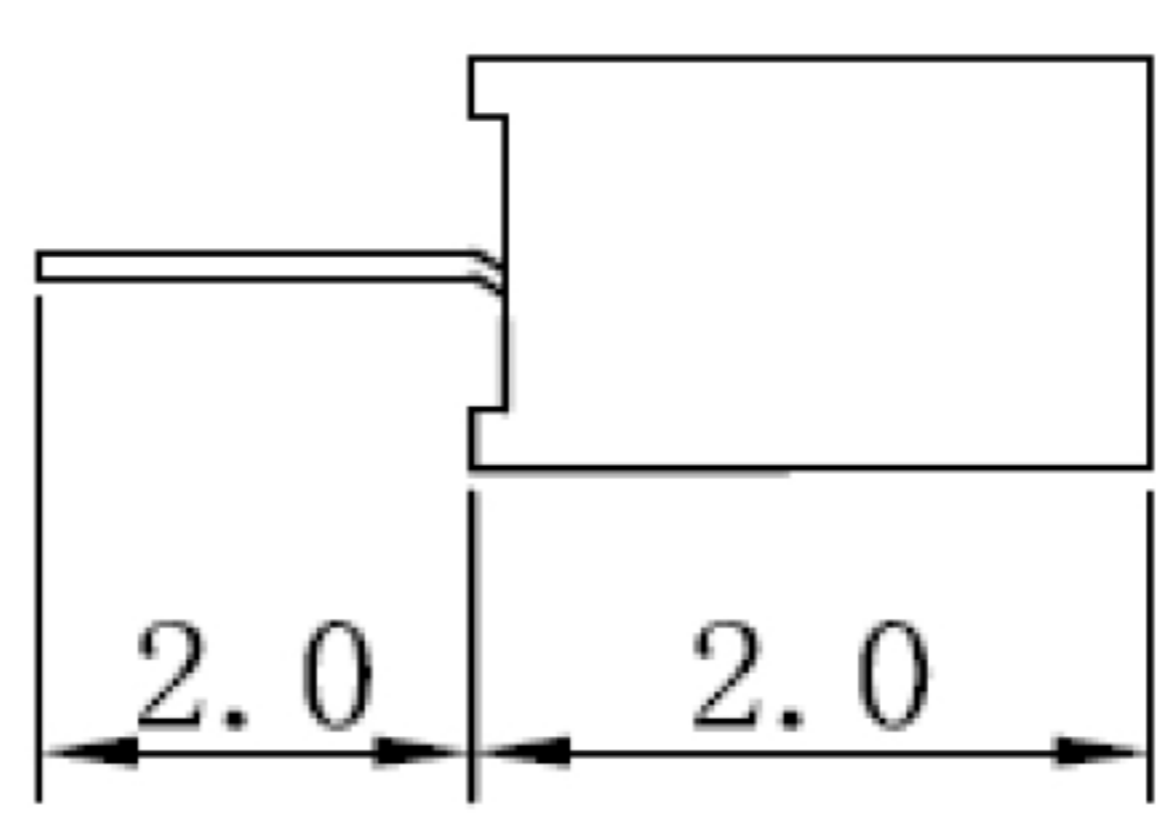


$A: (1.0 * PIN + 0.3) \pm 0.30$

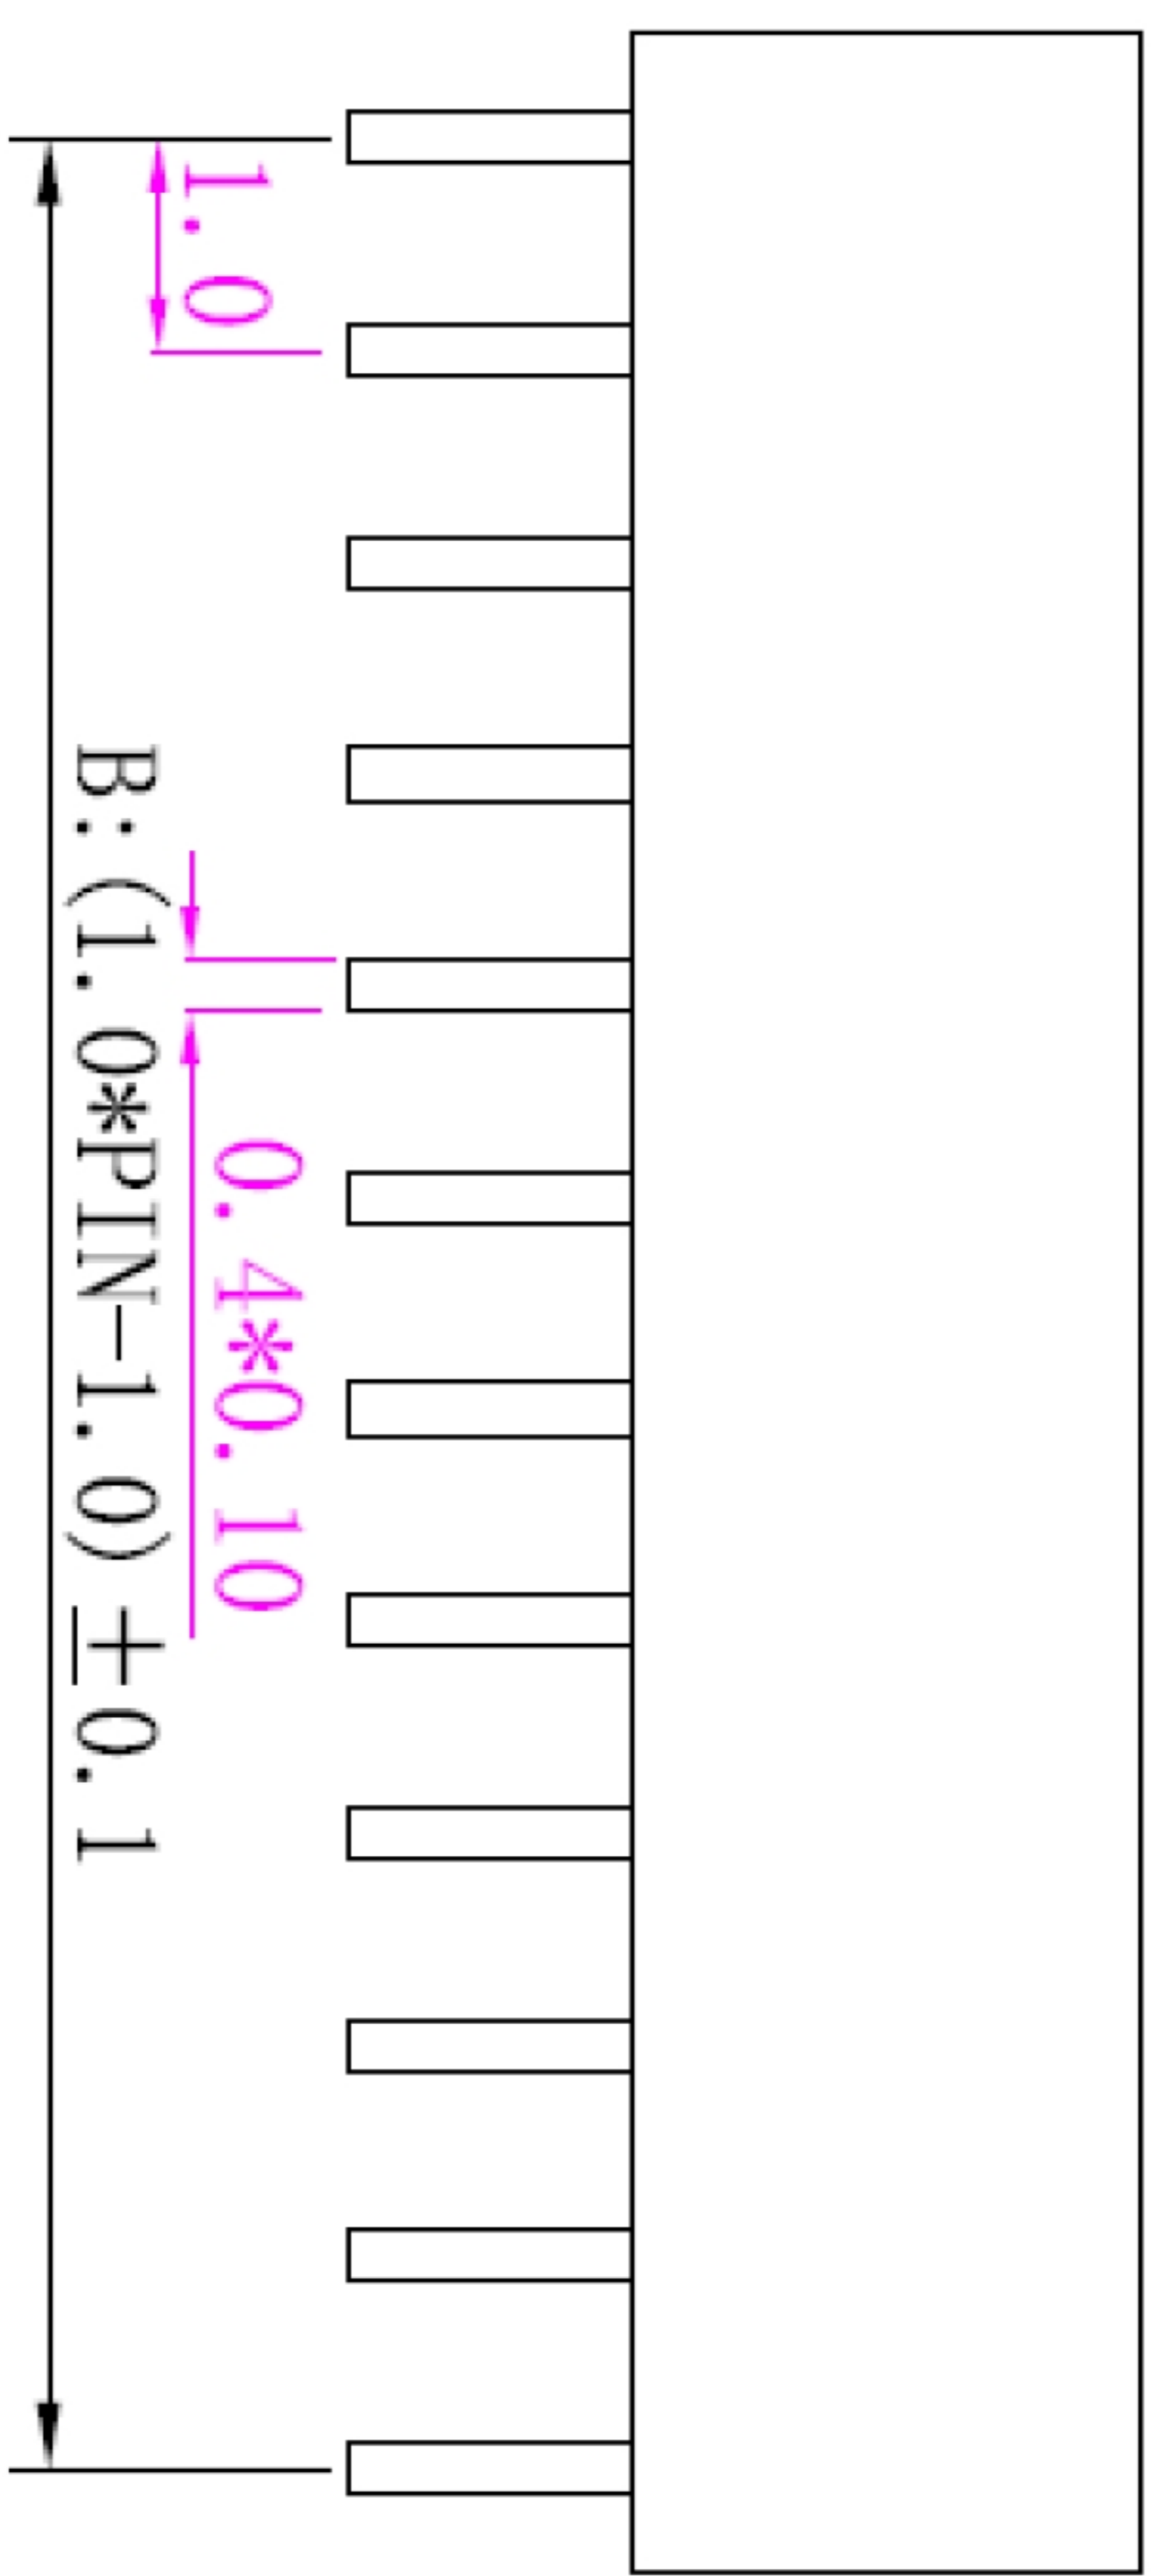

SPECIFICATIONS

- Current Rating: 1Amps
- Insulator Resistance: 5000Megohms min.
- Dielectric Withstanding: AC 500v
- Operating Temperature: -40°C ~ +105°C
- Contact Material: Brass
- Insulator Material: NYL-6T
- Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:			
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO.	GP25-1002WV-XP	SCALE:	1:1
CHECKED			UNIT:	mm	PROJ:	
APPROVALS			DRAWING NO.			
TOLERANCES ARE			30~Ø1E	±0.30	ANGLE	±2°
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10		

深圳市联丰电子有限公司  
SHENZHEN LIANFENG ELECTRONIC CO.,LTD