ROHS

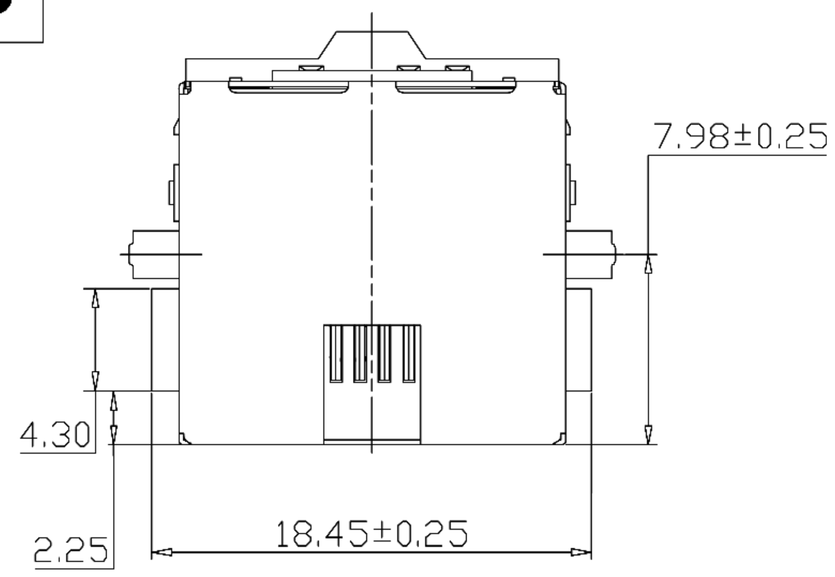

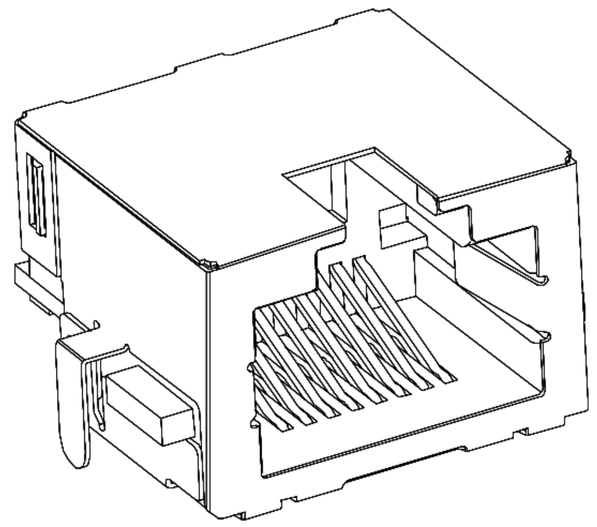

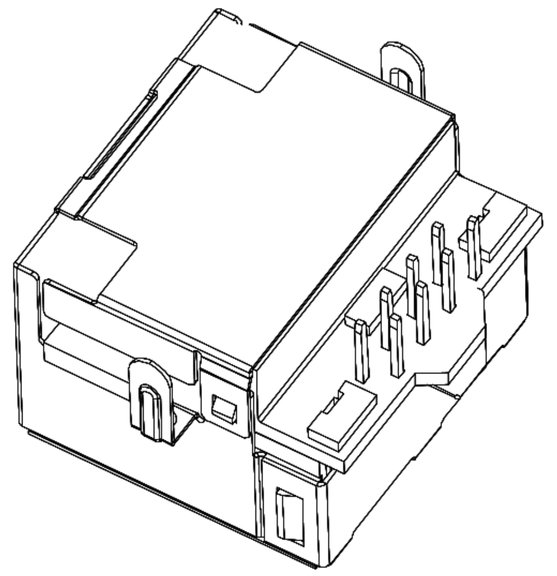

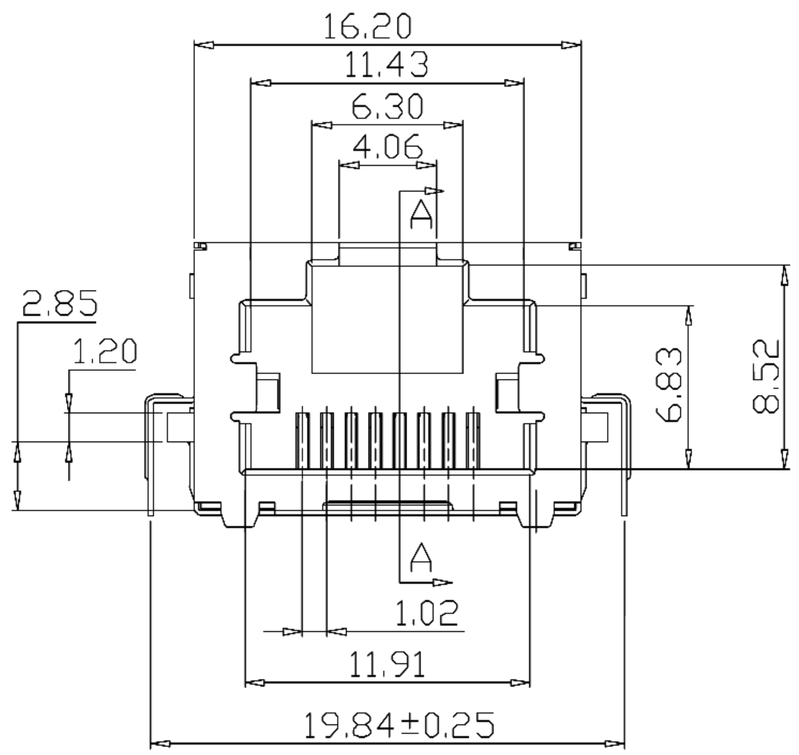

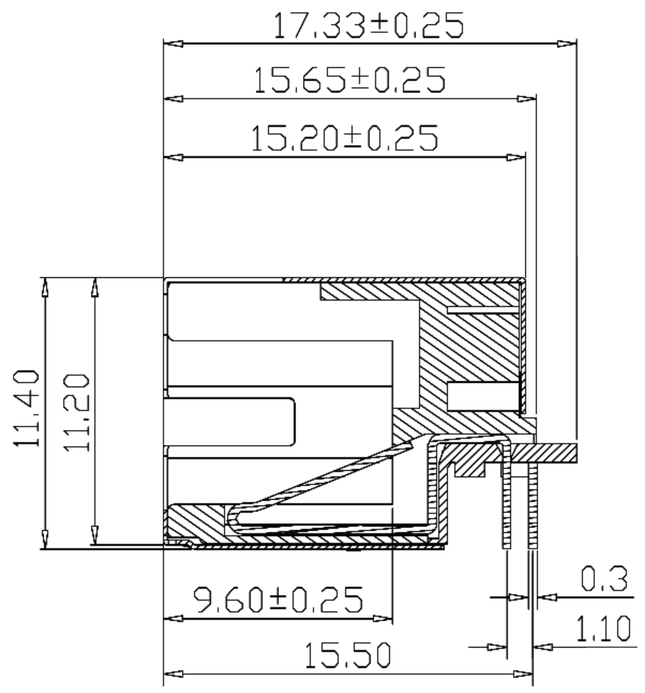

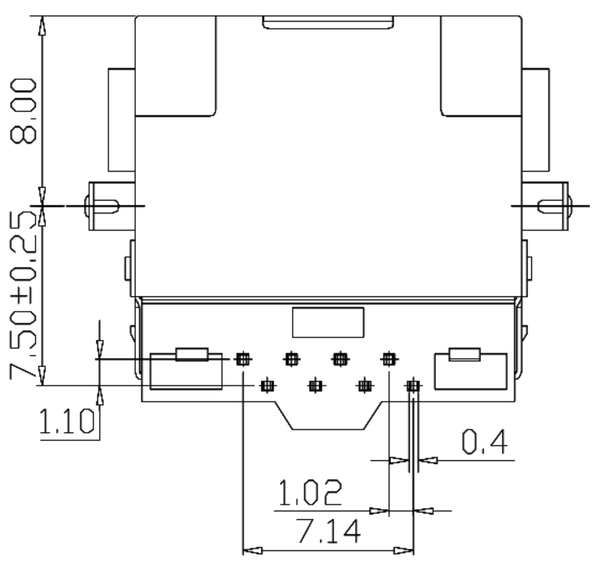

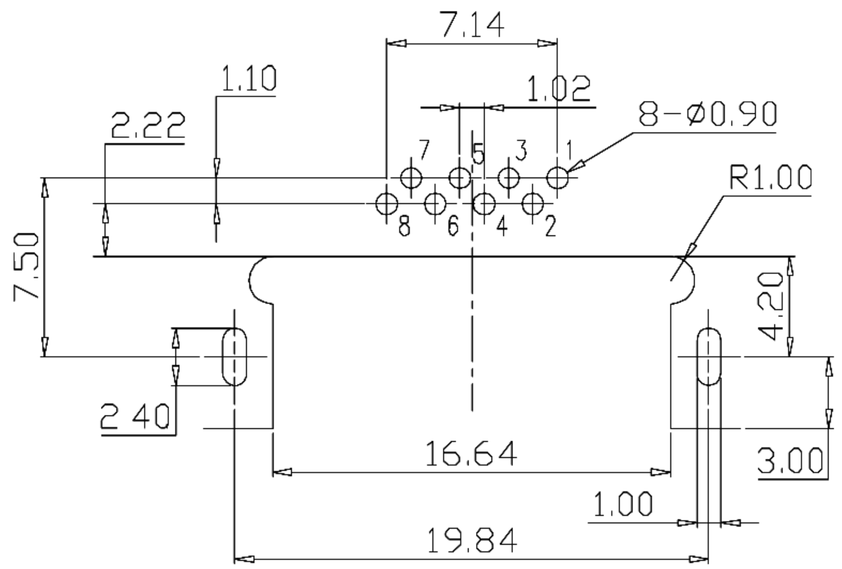

RECOMMENDED PCB LAYOUT (TOP VIEW)

(ALL TOLERANCES ARE ±0.05)

SPECIFICATIONS:

1. *Voltage: 150V AC RMS*
2. *Current Rating: 1.5A*
3. *Contact Resistance: 30mΩ MAX.*
4. *Insulation Resistance: 500MΩ MIN.*
5. *Dielectric Withstang Voltage :1000V AC*
6. *Operature Temperature: −40°C~80°C*
7. *Durability: 500 Mating Cycles MIN.*

NO.	PART NAME	Q'TY	MATERIAL	Material & Plating	Remark
3	Shielding	1	Brass	Ni Plating	
2	Terminal	8	Phosphor Bronze	PLATING & COLOR	
1	Housing	1	LCP+15% G.F UL94V-0	BLACK	

APPROVALS		DATE	深圳市联丰盈电子有限公司 SHENZHEN LINFENYING ELECTRONIC CO.,LTD	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			TITLE:	RJ CONNECTOR
APPROVALS			PART NO.	RJ45-6W11-CDN-AB-88-B1
TOLERANCES	30~ 以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1 PROJ.
			DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———